

Gypsol

High quality ultra thin screed for bonded and unbonded applications



Gypsol TS-15 screed is a revolutionary new anhydrite screed material. It is specially formulated to offer a strong and durable ultra-thin topping to a solid interior substrate, for example, in situ concrete or beam and block or precast concrete plank. Tested to BS 8204:1:2003 it meets the requirements for class A for impact resistance. Due to its ultra-thin depth, just 15mm minimum, TS-15 can be dried quickly allowing rapid return to service and application of finished floor coverings.

Gypsol TS-15 is perfectly suited to flooring applications where height is extremely restricted and offers a lightweight cost effective alternative to smoothing compounds. It can be installed extremely quickly to at least 2000m² per day. This represents a significant saving in time when compared to bagged, site mixed smoothing compounds and levelling screeds.

Gypsol TS-15 screed is designed to be laid to a minimum of 15mm depth and can be used either bonded directly to a solid substrate prepared in accordance with BS 8204:7:2003 or un-bonded on a polythene membrane.



For project specific advice on design and for a model specification, contact our technical and specifications team on 0800 6226023

Some typical applications include:

- Refurbishment of old uneven floors.
- Remediation or correction for out of level concrete slabs
- As a levelling screed over floors where floor to ceiling height is very restricted.
- Sub floor levelling in preparation to receive finished floor coverings.
- Overlay for poorly levelled screeds
- As an alternative to light weight screeds

Case study - Retail refurbishment

This project was a 4,500m² retail refurbishment. National screed installation specialist, Screedfloor Ltd, was asked to install a thin screed over an existing 4500m² rough concrete floor. The options available were limited by the fact that the screed had to be as thin as possible, as little as 15mm in places, but had to be able to vary in depth up to as much as 45mm. It also had to be fast to install, quick to dry and cost effective.

Gypsol TS-15 screed was the most appropriate material for the project. Requiring no reinforcement, TS-15 is designed and tested for applications that are bonded or un-bonded at just a 15mm depth, making it unique in the industry. An M13 NBS specification was drawn up which allowed the screed to be laid un-bonded over a simple polythene membrane, and offering huge reductions in the level of subfloor preparation that would have been required for a bonded alternative.

As TS-15 can be laid to a minimum of 15mm, each m³ yields more than 65m², so the speed of installation can be very rapid. In this project the first pour saw over 1,000m² installed in little more than six hours, and with the whole project being completed in just four visits.

0800 6226023
www.gypsol.co.uk
www.lkabminerals.com




Physical data

Appearance	Off white fluid mortar	
Density	Wet	2200kg/m ³
	Dry	2000kg/m ³
Minimum Strength	C35-F6	
Required Flow (EN 13454-2)	230mm to 270mm	
Reaction to Fire	Class A1 _{fl} non combustible	

Performance data

Working Time	Place and finish within 2 hours of batching.
	Finish within 1 hour of placing.
Foot Traffic	24 to 48 hours
Loading	5 to 7 days
Drying (50mm depth)	At 20°C and 60% RH - In excess of 1mm/day
Force Drying	Can be force dried after 7 days
Minimum depth	15mm

Typical application schematic

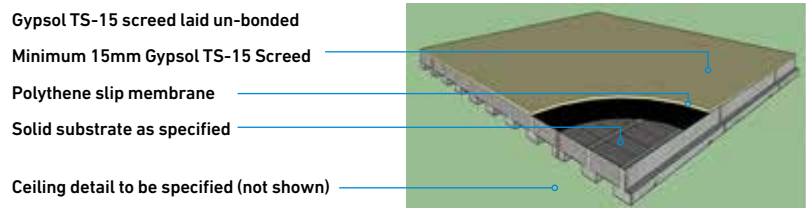

Environmental data

Recycled Content	Binder	98%
	Mortar up to	40%
Carbon Emissions	Binder	10 to 30kg/tonne
Minimum Strength	Mortar	30 to 50kg/m ³
VOC	Virtually zero	
Recyclability	100%	

Health and safety data

Gypsol TS-15 screed is delivered to site ready to use via offsite mixing plants removing the need for labour intensive site mixing and associated mixing equipment.

Gypsol TS-15 screed is pumped directly to where they are needed removing much of the manual handling operations required to install other screeds.

Gypsol TS-15 screed is generally pumped using equipment with closed or gridded dispensing hoppers removing risk of contact with moving machinery.

Gypsol TS-15 screed is finished using a lightweight dappling bar requiring no secondary compaction thus removing most of the physical work needed to lay other screeds. This significantly reduces the negative impact on the musculo-skeletal system of installing contractors. For material safety information please see the relevant health and safety data sheets.